

Shower panels

Great new style, contemporary shower panel combining integral riser rail with shower handset and pulsating body jets. | Three invigorating body jets, atomizing the water as it emerges, giving total body coverage. | Three spray handset with Rub-clean function to remove limescale, giving great performance from your shower, time after time. | Thermostatic temperature control for maintaining desired showering temperature to +/- 1°C. | Requires stored hot and cold water and gives best performance when used with a 3 bar shower pump.

Colour availability: 1 White/chrome 2 Matt chrome effect



Matrix-T

Three invigorating body jets give total body coverage in a great new panel style.

In general shower panels must be used in conjunction with pumped or pressurised water systems, but can be used with many types of combination boiler (please check manufacturer's performance data first).


Minimum pressure required is 0.7 bar when only one function can be used at a time

Pressure Requirements:

Minimum: 0.7 bar (running pressure)

Maximum: 10.00 bar

Optimum operation inlet pressure: 3.0 bar

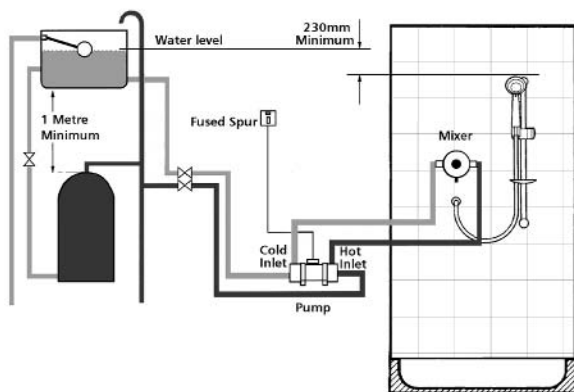

NewTeam Limited
Brunel Road
Earlstrees Industrial Estate
Corby
Northants
NN17 4JW

Customer Service Department
Telephone: +44 (0) 1536 264012
Fax: +44 (0) 1536 409201



www.newteamshowers.com

A Masco Company