

Power showers

All-in-one power showers that combine a mixing valve with a pump, in one complete unit.

For correct operation of NewTeam all-in-one power showers, both hot and cold water supplies to the shower unit must be gravity fed, from a cold water storage tank and a hot water storage cylinder of 112 litre capacity (25 gallons).


Electrical connections must be a local supply from a 13 amp ring main, fused at 3 amp.

Please note:

Do not connect directly to mains water.

Power showers are not suitable for combination boilers or combination cylinders.

The diagram below shows the basic water connections required for typical power shower installations.

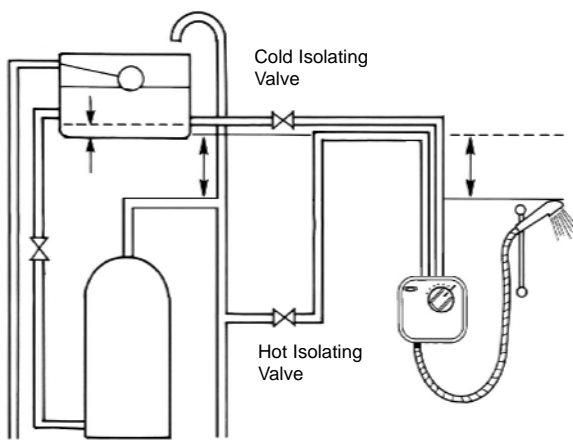

Typical Power Shower Installation



Handset heaven Rub-clean handset with three invigorating spray patterns - Spray, Massage and Combination Spray.

NT 1000-XT

A high quality power shower with thermostatic control and push button Stop/Start.

High flowing power shower that delivers up to 10 litres of flow per minute. | Thermostatic control keeps water temperature within +/- 1°C. | Simple push button Stop/Start control. | Easy-grip lever, controls the temperature. | Stylish three spray massage handset with Rub-clean feature. | New-style riser rail that fits flush to the wall, with integrated hose retainer and soap tray. | Riser rail with smooth glide action slider for single handed adjustment. | Top or bottom pipe entry along with push-fit fittings, ensuring easy installation.

Colour availability: 1 White 2 Matt chrome effect



NewTeam Limited
Brunel Road
Earlstrees Industrial Estate
Corby
Northants
NN17 4JW

Customer Service Department
Telephone: +44 (0) 1536 264012
Fax: +44 (0) 1536 409201

www.newteamshowers.com

A Masco Company

