


## Mixer showers

A mixer shower uses a simple shower valve to blend your hot and cold water supplies to achieve the showering temperature and flow that you desire.

Mixer showers are ideal when fitted onto a gravity site situation, i.e. a separate hot and cold water supply, gravity fed by a storage tank of at least 112 litres (25 gallons) capacity. They require a minimum head of 0.1bar (1 metre) between the bottom of the cold tank and the handset position.

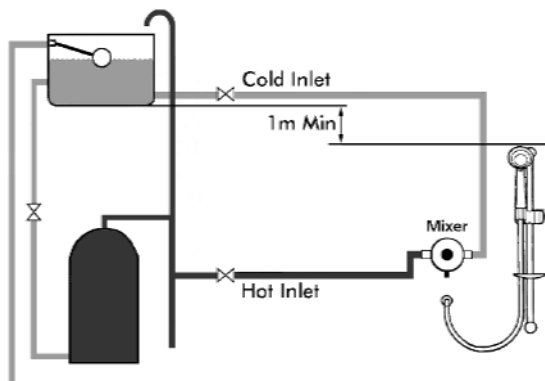


Typical Gravity Shower Installation

They can also be used if you have a combination boiler or multi-point water heater.

The 100 Series Thermostatic mixer shower can be fitted directly onto high/unequal installations without additional fittings being required.

The NT911 Manual Mixer shower can be used on high pressure systems with nominally equal pressures (Pressurised cylinders) without additional fittings being required. If this valve is used on systems that produce unequal inlet pressures or are liable to fluctuate when other appliances or outlets within the property are being used (e.g. Combination boilers, Multipoint Heaters), you must install a NewTeam Pressure Equalising Valve (PEV) in the supplies to the mixing valve.

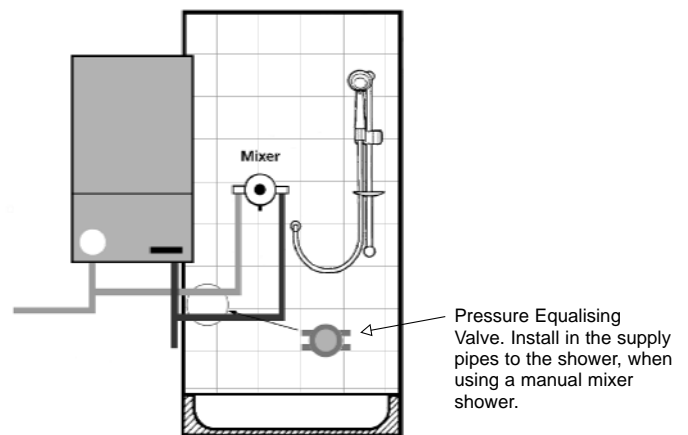

Typical Mains Pressure Shower Installation

**For a typical gravity site situation mixer showers may also be combined with a remote shower pump to give a 'pumped shower' with 'power shower' performance.**

## 100 Series surface mounted option

Solving the problem for both low and high pressure systems.

High flowing thermostatic mixer shower that maintains precise temperature control to +/- 1°C ensuring safe showering. | Separate flow and temperature controls ensure that the next visit to the shower requires no adjustment. | Modern style riser rail with smooth glide action slider for single handed adjustment.

Moveable rail end allows use of existing screw holes, reducing tile damage. | Brass body to ensure longevity in hard water areas. | High performance brass cartridge that will work on both low water pressures as well as mains pressures of up to 5.0 bar. | Adjustable inlet elbows with push-fit fittings for ease of installation. | Fully serviceable from the front, so there is no disruption to wall finishes or decoration. | To get maximum performance from this shower, whether your installation is low or high pressure, NewTeam have incorporated two handsets in the box.

**Colour availability: 1 Chrome 2 Gold**



**Hot stuff** The temperature override button ensures that the temperature does not accidentally get too high.

**NewTeam Limited**  
Brunel Road  
Earlstrees Industrial Estate  
Corby  
Northants  
NN17 4JW

**Customer Service Department**  
Telephone: +44 (0) 1536 264012  
Fax: +44 (0) 1536 409201

[www.newteamshowers.com](http://www.newteamshowers.com)

**A Masco Company**

