

## Power showers

All-in-one power showers that combine a mixing valve with a pump, in one complete unit.

For correct operation of NewTeam all-in-one power showers, both hot and cold water supplies to the shower unit must be gravity fed, from a cold water storage tank and a hot water storage cylinder of 112 litre capacity (25 gallons).


Electrical connections must be a local supply from a 13 amp ring main, fused at 3 amp.

Please note:

**Do not connect directly to mains water.**

**Power showers are not suitable for combination boilers or combination cylinders.**

The diagram below shows the basic water connections required for typical power shower installations.

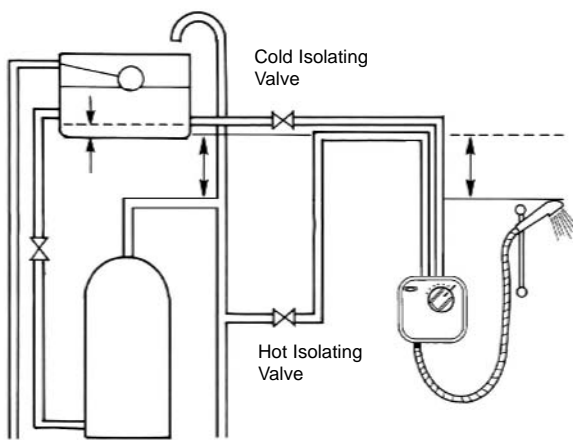

Typical Power Shower Installation



**Feel the force** Push button Stop/Start, plus Shower Boost button that switches the NT 1500-XT between power or gravity shower modes.

## NT 1500-XT

A high performance shower that converts from invigorating power shower to water saving gravity shower at the push of a button.

High flowing power shower that delivers up to 10 litres of flow per minute | Thermostatic control keeps water temperature within +/- 1°C | Push button shower boost, means that it can be a power shower, or can run as a gravity shower, if desired, for better water economy | Stylish three spray, massage handset with Rub-clean feature. | New-style riser rail that fits flush to wall, with integrated hose retainer and soap tray. | Riser rail with smooth glide action slider for single handed adjustment. | Top, bottom or concealed rear pipe entry along with push-fit fittings, ensuring easy installation.

**Colour availability: 1 White 2 Matt chrome effect**



**NewTeam Limited**  
Brunel Road  
Earlstrees Industrial Estate  
Corby  
Northants  
NN17 4JW

**Customer Service Department**  
Telephone: +44 (0) 1536 264012  
Fax: +44 (0) 1536 409201

[www.newteamshowers.com](http://www.newteamshowers.com)

**A Masco Company**

