

## Power showers

All-in-one power showers that combine a mixing valve with a pump, in one complete unit.

For correct operation of NewTeam all-in-one power showers, both hot and cold water supplies to the shower unit must be gravity fed, from a cold water storage tank and a hot water storage cylinder of 112 litre capacity (25 gallons).


Electrical connections must be a local supply from a 13 amp ring main, fused at 3 amp.

Please note:

**Do not connect directly to mains water.**

**Power showers are not suitable for combination boilers or combination cylinders.**

The diagram below shows the basic water connections required for typical power shower installations.

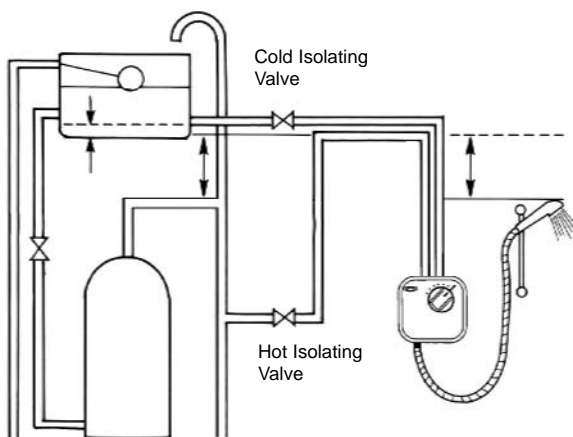

Typical Power Shower Installation



**Handset heaven** Rub-clean handset with three invigorating spray patterns - Spray, Massage and Combination Spray.

## NT 201-T

High performance, minimal noise and easy installation.

High flowing, thermostatic shower that delivers up to 12 litres of water per minute. | High performance with reduced noise - the 201-T is NewTeam's quietest power shower. | With a long-life motor, the NT201-T is continuously rated to give constant showering time after time. | Temperature limit stop, with over-ride, which is pre-set to 37°C to prevent accidental scalding. | With independent on/off and temperature controls, your desired showering temperature can be selected ready for your next visit to the shower. | Water and electrical connections can be from above, below or behind the shower - making the NT 201-T easy to install. | Luxury massage handset with three distinct spray patterns and Rub-clean feature to ensure the easy removal of limescale.

| **Colour availability: 1 White 2 Matt chrome effect**



**NewTeam Limited**  
Brunel Road  
Earlstrees Industrial Estate  
Corby  
Northants  
NN17 4JW

**Customer Service Department**  
Telephone: +44 (0) 1536 264012  
Fax: +44 (0) 1536 409201



[www.newteamshowers.com](http://www.newteamshowers.com)

**A Masco Company**