

Shower panels

Three spray overhead shower with Pin-clean feature | Four invigorating body jets, atomizing the water as it emerges, giving total body coverage. | Three spray handset with Pin-clean function to remove limescale, giving great performance from your shower, time after time. | Thermostatic temperature control for maintaining desired showering temperature to +/- 1°C | Temperature regulator with over-ride, which is pre-set to 37°C to prevent accidental scalding. | Requires stored hot and cold water and gives best performance when used with a 3 bar shower pump.

Colour availability: 1 White/chrome 2 Matt chrome effect



Diva-T

Four body jets, thermostatic control and plenty of shelf space.

In general shower panels must be used in conjunction with pumped or pressurised water systems, but can be used with many types of combination boiler (please check manufacturer's performance data first).


Minimum pressure required is 0.7 bar when only one function can be used at a time

Pressure Requirements:

Minimum: 0.7 bar (running pressure)

Maximum: 10.00 bar

Optimum operation inlet pressure: 3.0 bar

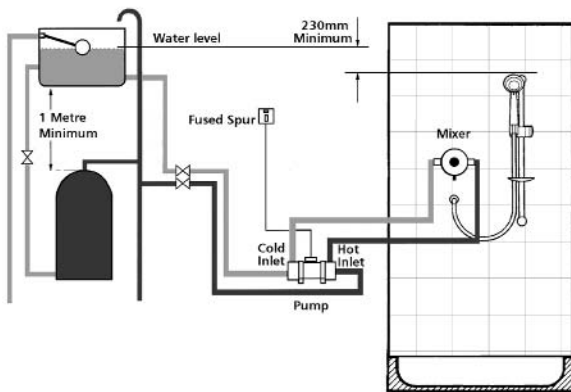

NewTeam Limited
Brunel Road
Earlstrees Industrial Estate
Corby
Northants
NN17 4JW

Customer Service Department
Telephone: +44 (0) 1536 264012
Fax: +44 (0) 1536 409201



www.newteamshowers.com

A Masco Company