


## Electric showers

Instantaneous showers that draw water direct from a cold mains water supply and only heat the water that is used.

Ideal for a second bathroom or for homes that do not have a stored hot water supply.

NewTeam electric showers must be installed to a mains cold water supply with a minimum running pressure of 1.0 bar.

A separate and permanently connected cable must be taken from the consumer unit directly to the shower via a double pole isolating switch. The installation must comply with the latest IEE wiring regulations.

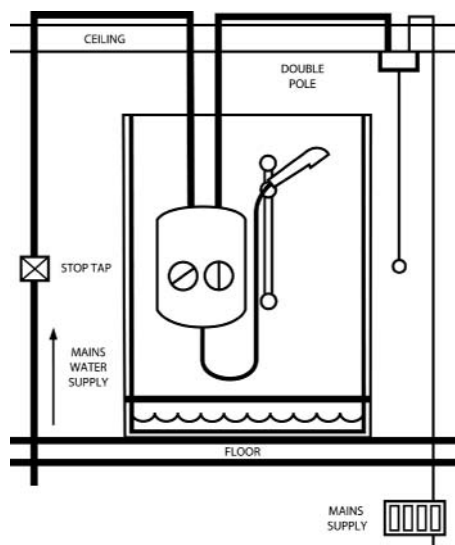

Typical Electric Shower Installation

Performance of all electric showers varies with the incoming water temperature and therefore fluctuates as the seasons change.

The following flow rates for NewTeam electric showers were recorded under typical installation conditions and can be used as a guide to expected performance.

	NewTeam 7.8	NewTeam 8.5	NewTeam 9.5	NewTeam 10.4
Flow Rate Litres / minute	4.5	4.9	5.4	6.0

Note: All flow rates measured on Spray mode at 38°C summer time use. 15°C inlet temperature.

	NewTeam 7.8	NewTeam 8.5	NewTeam 9.5	NewTeam 10.4
Recommended cable size	6mm	6mm	10mm	10mm

Note: Based on typical cable length for a standard three bedroom household.




## NT 7.8, 8.5, 9.5, 10.4kW

With left or right hand pipe connection.

| Unique swivel elbow pipe connection, allowing plumbing to enter shower from left or right hand side. Ideal for retrofit installations as often no extra plumbing is required. | Indicator lights to show low incoming water pressure and when the selected temperature is too high to allow sufficient water flow through the heating elements. | Phased shut-down safety feature – the shower will continue to run on for a few seconds after being switched off. This flushes out excess hot water from the shower and reduces limescale build-up inside the unit. | Separate temperature control to ensure that your next visit to the shower needs no further adjustment. | Temperature stabilisation to minimise temperature fluctuation when other taps are opened. | Luxury three spray handset with Rub-clean feature. | New-style riser rail that fits flush to wall, with integrated hose retainer and soap tray. | Available in 7.8, 8.5, 9.5, 10.4kW rating. |

**Colour availability: 1 White 2 Matt chrome effect.**

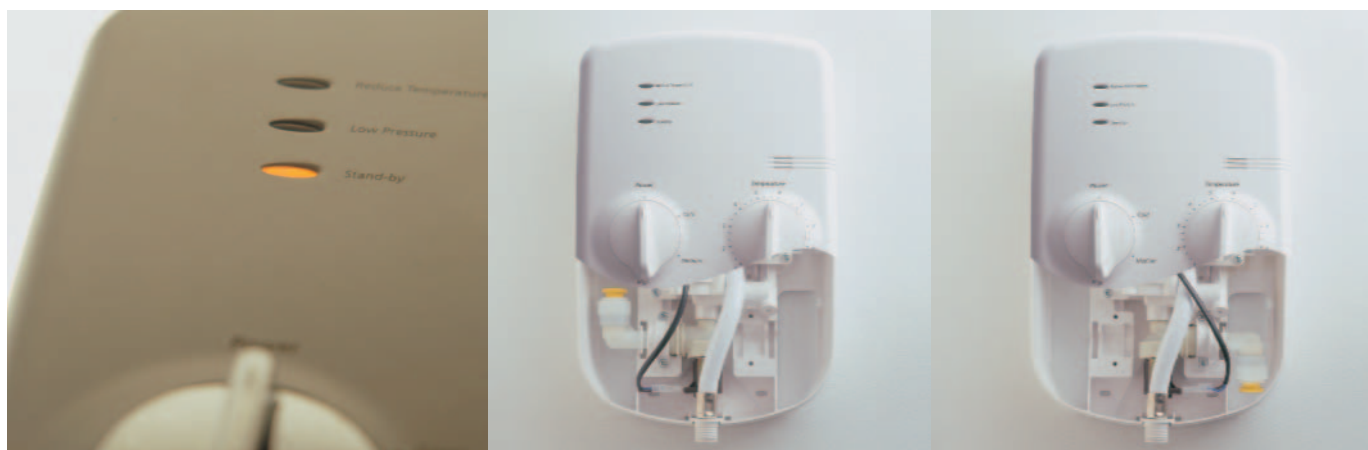

**NewTeam Limited**  
Brunel Road  
Earlstrees Industrial Estate  
Corby  
Northants  
NN17 4JW

**Customer Service Department**  
Telephone: +44 (0) 1536 264012  
Fax: +44 (0) 1536 409201



[www.newteamshowers.com](http://www.newteamshowers.com)

**A Masco Company**