

## Mixer showers

High performance manual mixer shower with single lever to operate both flow and temperature control. | Brass bodied mixer shower incorporating ceramic disc cartridge resists build-up of limescale. | Maximum temperature stop feature for safety prevents accidental selection of high showering temperatures. | Both surface mounted and recessed versions included in the box. | Pipework can be connected from above, below or rear. | Modern style riser rail with smooth glide action slider for single handed adjustment. | Moveable rail end allows use of existing screw holes, reducing tile damage.

**Colour availability: Matt chrome effect**




# NT 911-M

Upgrade your NT 911-M with a new Cardinal showeret.

A mixer shower uses a simple shower valve to blend your hot and cold water supplies to achieve the showering temperature and flow that you desire.

Mixer showers are ideal when fitted onto a gravity site situation, i.e. a separate hot and cold water supply, gravity fed by a storage tank of at least 112 litres (25 gallons) capacity. They require a minimum head of 0.1bar (1 metre) between the bottom of the cold tank and the handset position.

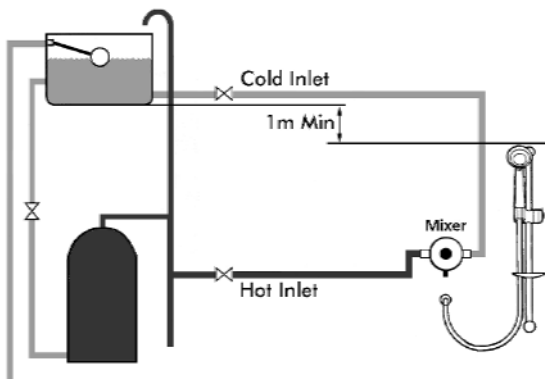


## Typical Gravity Shower Installation

They can also be used if you have a combination boiler or multi-point water heater.

The 100 Series Thermostatic mixer shower can be fitted directly onto high/unequal installations without additional fittings being required.

The NT911 Manual Mixer shower can be used on high pressure systems with nominally equal pressures (Pressurised cylinders) without additional fittings being required. If this valve is used on systems that produce unequal inlet pressures or are liable to fluctuate when other appliances or outlets within the property are being used (e.g. Combination boilers, Multipoint Heaters), you must install a NewTeam Pressure Equalising Valve (PEV) in the supplies to the mixing valve.

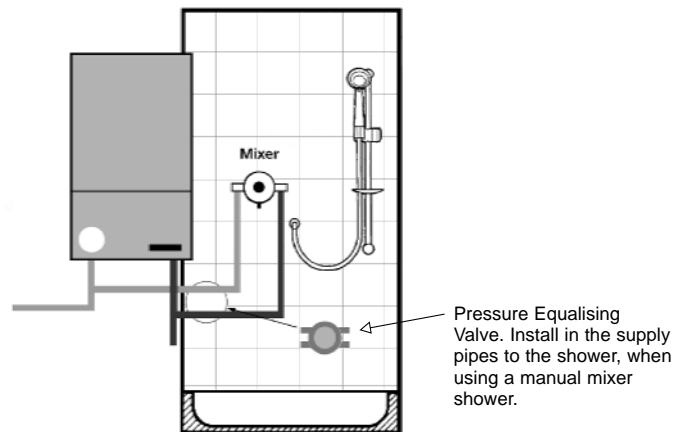

## Typical Mains Pressure Shower Installation

For a typical gravity site situation mixer showers may also be combined with a remote shower pump to give a 'pumped shower' with 'power shower' performance.

**NewTeam Limited**  
Brunel Road  
Earlstrees Industrial Estate  
Corby  
Northants  
NN17 4JW

**Customer Service Department**  
Telephone: +44 (0) 1536 264012  
Fax: +44 (0) 1536 409201



[www.newteamshowers.com](http://www.newteamshowers.com)

**A Masco Company**